

# Section 2E







**Acrovyn Faced Door Height Assemblies  
&  
Storey Height Assemblies with Transom**

**FD30 - BS476 Pt.22 :1987**

**15x4mm PVC encased Lorient 617**

**LATCHED DOORSETS**

**2E.1**

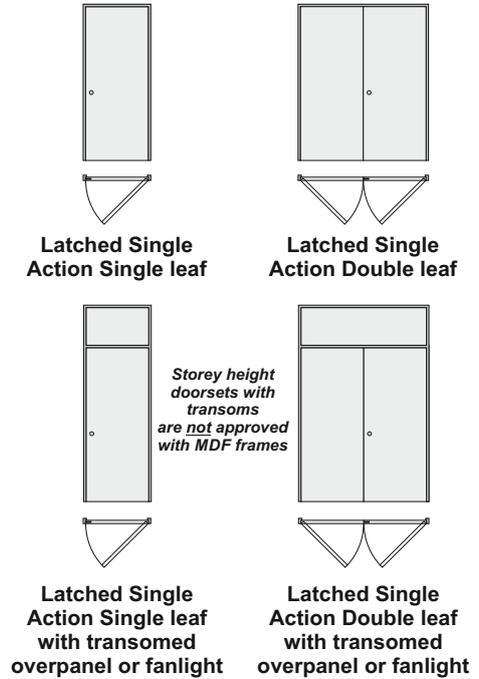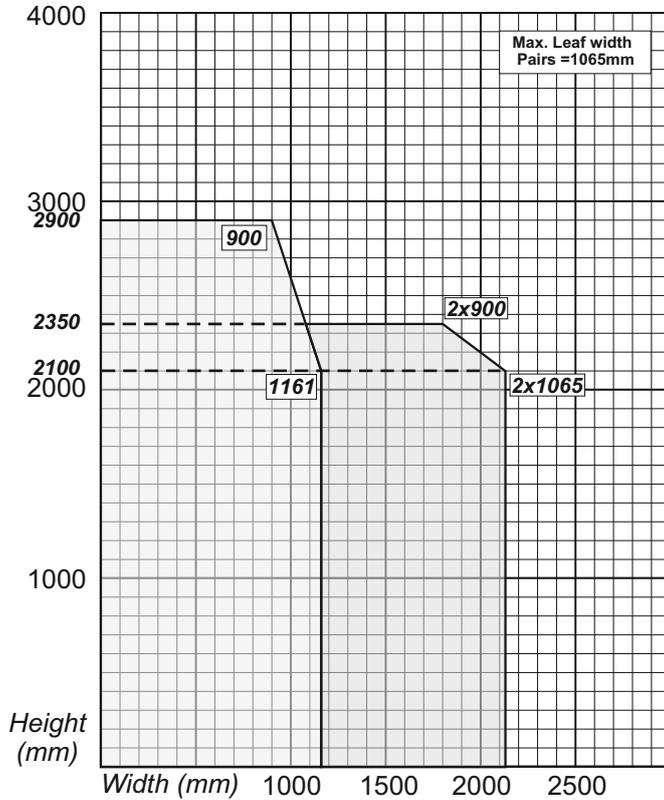

Configuration		Height (mm)	Width (mm)
Latched Single Action Single Door (LSASD)	From	2100	1161
	To	2900	900
Latched Single Action Double Door (LSADD)	From	2100	1065
	To	2350	900

Maximum Glazed Area See Section 6:	Single door doorset	1.9m <sup>2</sup>	Maximum Overpanel height	Single door doorset	2000mm
	Double door doorset			Double door doorset	1500mm



Frame Specification See Section 7	Single door doorset Double door doorset <i>NOTE: Storey height doorsets with transoms are not approved with MDF frames.</i>	450kg/m <sup>3</sup> Softwood or Hardwood OR 700kg/m <sup>3</sup> MDF OR Streframe
--------------------------------------	---	--

<p><b>Intumescent Seals</b> 15x4mm PVC encapsulated <b>Lorient 617</b></p> <p>See Section 4 - Intumescent Seals and Section 9 - Hardware for further information</p>	<p><b>Head:</b> 1No. 15x4mm exposed and fitted centrally in the door leaf.</p> <p><b>Jamb's &amp; Overpanel:</b> 1No. 15x4mm exposed and centrally fitted to door leaf / overpanel.</p> <p><b>Meeting edges:</b> <b>Square:</b> 1No. 15x4mm fitted centrally in both door leaves.</p>
--	---

Acrovyn Faced Strebord 44 & Superpan / Wood Frames / FD30 Fire Door Applications



**UNLATCHED DOORSETS**

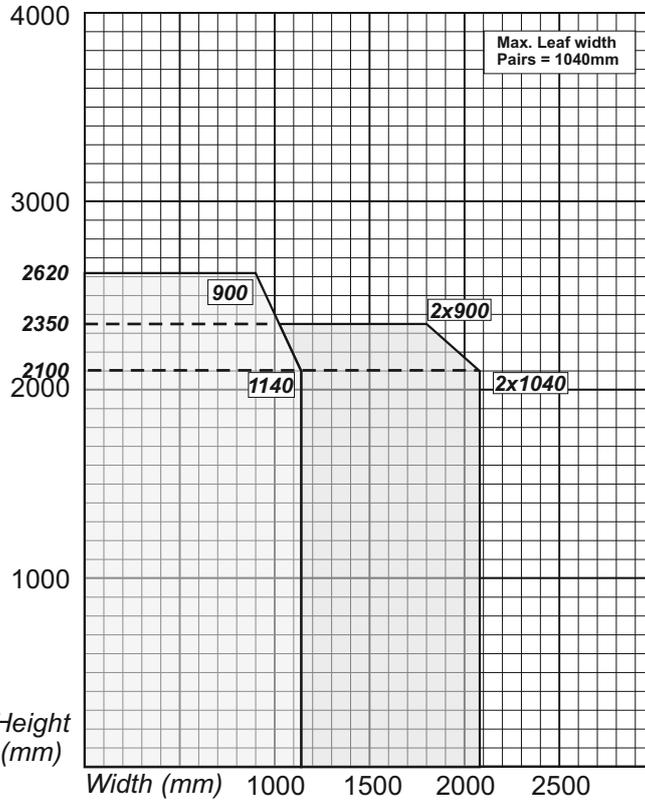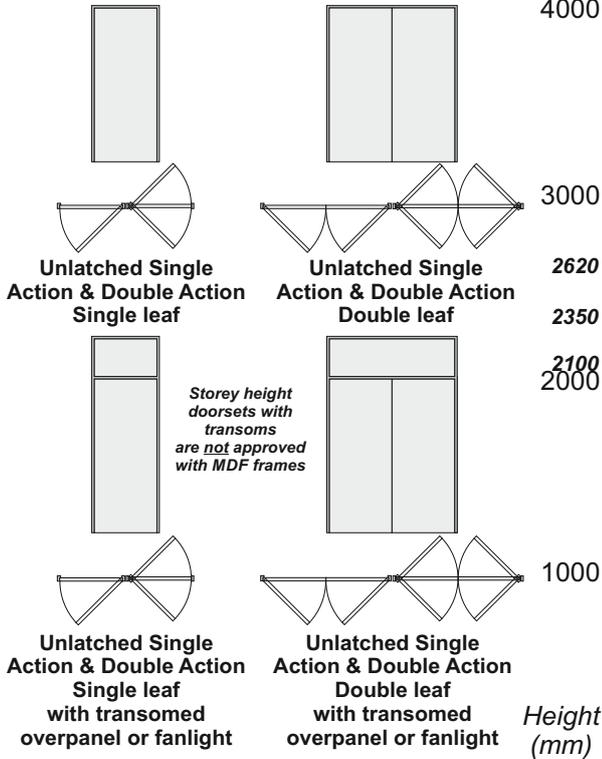

Configuration		Height (mm)	Width (mm)
Unlatched Single Action Single Door (ULSASD)	From	2100	1140
	To	2620	900
Double Action Single Door (DASD)	From	2100	1140
	To	2620	900
Unlatched Single Action Double Door (ULSADD)	From	2100	1040
	To	2350	900
Double Action Double Door (DADD)	From	2100	1040
	To	2350	900

Maximum Glazed Area See Section 6:	Single door doorset Double door doorset	1.9m <sup>2</sup>	Maximum Overpanel height	Single door doorset Double door doorset	2000mm 1500mm
---------------------------------------	--	-------------------	--------------------------	--	------------------

Frame Specification See Section 7	Single door doorset Double door doorset <i>NOTE: Storey height doorsets with transoms are not approved with MDF frames.</i>	450kg/m <sup>3</sup> Softwood or Hardwood OR 700kg/m <sup>3</sup> MDF OR Streframe
--------------------------------------	---	--

Intumescent Seals 15x4mm PVC encapsulated <b>Lorient 617</b>  See Section 4 - Intumescent Seals and Section 9 - Hardware for further information	Head: 1No. 15x4mm exposed and fitted centrally in the door leaf. Jams & Overpanel: 1No. 15x4mm exposed and centrally fitted to door leaf / overpanel. Meeting edges: Square: 1No. 15x4mm fitted centrally in both door leaves.
--	---

