

Section 2G





MDF Frames

Door Height Assemblies

Strebord⁵⁴

Door Core MDF Frames



FD60 - BS476 Pt.22 :1987

v9.1

2G.1

**2x15x4mm PVC encased
Pyroplex**

LATCHED DOORSETS

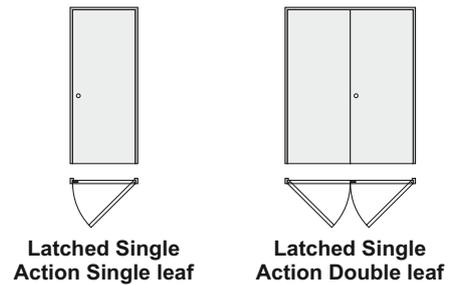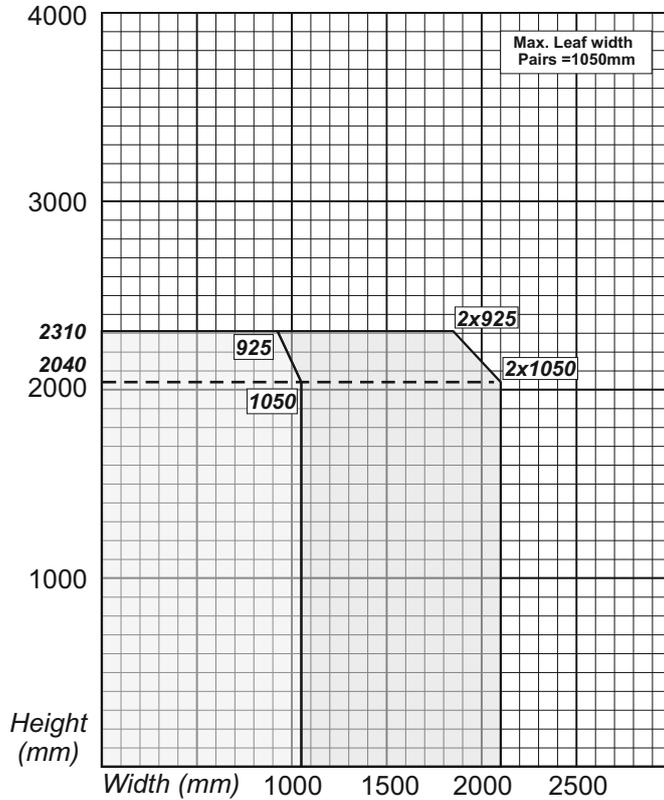

Configuration		Height (mm)	Width (mm)
Latched Single Action Single Door (LSASD)	From	2040	1050
	To	2310	925
Latched Single Action Double Door (LSADD)	From	2040	1050
	To	2310	925

Maximum Glazed Area See Section 6:	Single door doorset	0.72m ²	Maximum Overpanel height	Single door doorset	Not Approved
	Double door doorset			Double door doorset	

Frame Specification See Section 7	Single door doorset	Min.700kg/m ³ MDF
	Double door doorset	

NOTE: Storey height doorsets with transoms are not approved with MDF frames.

Intumescent Seals 2x15x4mm PVC encapsulated Pyroplex See Section 4 - Intumescent Seals and Section 9 - Hardware for further information	Head: 2No. 15x4mm exposed, separated by 10mm and fitted centrally in the leaf or frame head. Jams & Overpanel: 2No. 15x4mm exposed, separated by 10mm and centrally fitted to leaf or frame. Meeting edges: Square: 2No. 15x4mm spaced 10mm apart and centrally fitted in one leaf. Rebated: NOT APPROVED.
---	---



Strebord⁵⁴ / MDF Frames / FD60 Fire Door Applications



FD60 - BS476 Pt.22 :1987

UNLATCHED DOORSETS

**2x15x4mm PVC encased
Pyroplex**

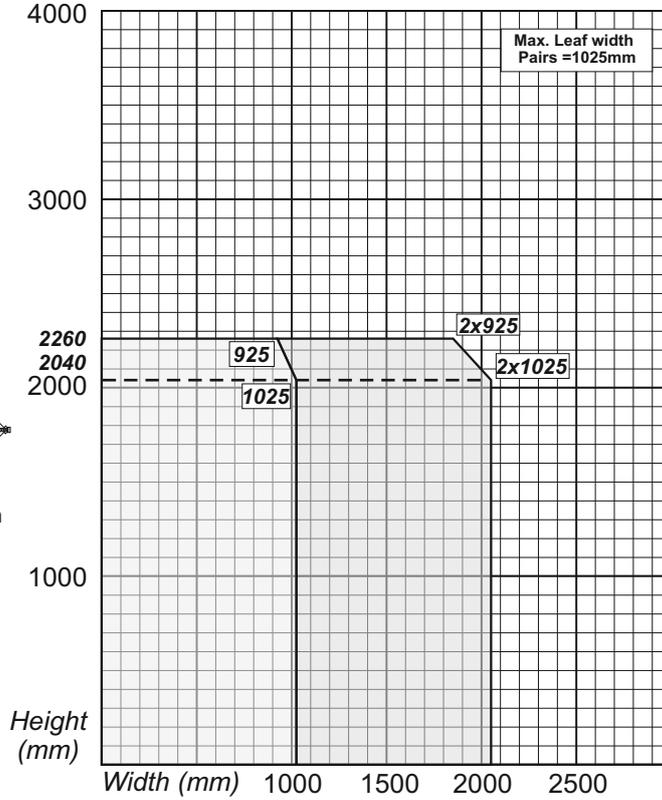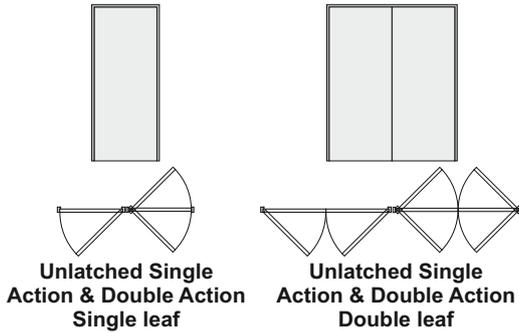

Configuration		Height (mm)	Width (mm)
Unlatched Single Action Single Door (ULSASD)	From	2040	1025
	To	2260	925
Double Action Single Door (DASD)	From	2040	1025
	To	2260	925
Unlatched Single Action Double Door (ULSADD)	From	2040	1025
	To	2260	925
Double Action Double Door (DADD)	From	2040	1025
	To	2260	925

Maximum Glazed Area See Section 6:	Single door doorset Double door doorset	0.72m ²	Maximum Overpanel height	Single door doorset Double door doorset	Not Approved
---------------------------------------	--	--------------------	--------------------------	--	--------------

Frame Specification See Section 7	Single door doorset Double door doorset <i>NOTE: Storey height doorsets with transoms are not approved with MDF frames.</i>	Min.700kg/m ³ MDF
--------------------------------------	---	---------------------------------

<p>Intumescent Seals 2x15x4mm PVC encapsulated Pyroplex</p> <p>See Section 4 - Intumescent Seals and Section 9 - Hardware for further information</p>	<p>Head: 2No. 15x4mm exposed, separated by 10mm and fitted centrally in the leaf or frame head.</p> <p>Jams & Overpanel: 2No. 15x4mm exposed, separated by 10mm and centrally fitted to leaf or frame.</p> <p>Meeting edges:</p> <p>Square: 2No. 15x4mm spaced 10mm apart and centrally fitted in one leaf.</p> <p>Rebated: NOT APPROVED</p>
--	---

Strebord⁵⁴ / MDF Frames / FD60 Fire Door Applications

