



## Resysta® Decking

**Resysta® rightly claim that 'some miracles happen'. Resysta® is a cutting edge material development that combines the pleasing aesthetic qualities of hardwood whilst overcoming the inherent problems of timber. Resysta® does not rot and is resistant to insect and fungal decay. Resysta® does not fade to grey in sunlight, nor will it swell or shrink in water, whether fresh, salt or chlorinated. Resysta® is very stable, even in the harshest of climates and has admirable ecological credentials due to its ingredients, which are rice husks, mineral oil and rock salt. Resysta® can even be recycled.**

All of these qualities produce an exceptionally low maintenance material. Whether left raw, lacquered with Resysta® Glaze or painted with Resysta® Colour Concept, no loss of colour occurs except for an initial minor settling after installation. Resysta® is an extruded product which is available in a range of profiles, including claddings, facades and sun and rain screening.

As if these qualities were not enough, Resysta® tests to B2(E) fire rating, has a class 1 durability rating (the highest resistance to wood destructive fungi) and has a Brinnel hardness value of 81.1 N/mm<sup>2</sup>. Resysta® can be drilled, sawn, mitred, sanded and fixed with ordinary timber tools.


Resysta® has been accredited with an Environmental Product Declaration (EPD) to EN15804 which reinforces the product's excellent environmental story.



To see the EPD Report, please visit [www.falconpp.co.uk/products/resysta](http://www.falconpp.co.uk/products/resysta) and click on the link below the EPD logo.

For further information on Resysta's range of products or advice on how Resysta® can be used in your project, please contact **Simon Heron** on **07884 736572** or go to [www.falconpp.co.uk/products/resysta](http://www.falconpp.co.uk/products/resysta)

### Grooved Decking

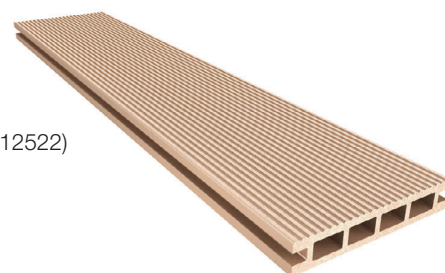

#### Dimension

22 x 125 mm (DKG12522)

#### Length

3.0, 4.0 and 5.0m

### Smooth Decking



#### Dimension


20 x 140 mm (DKG14020)

20 x 200 mm (DKG20020)

#### Length

3.0, 4.0 and 5.0m

### Runner

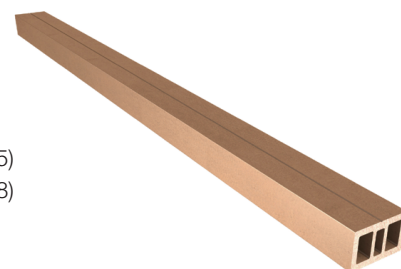

#### Dimension

25 x 38 mm (RUH3825)

38 x 70 mm (RUH7038)

#### Length

3.0, 4.0 and 5.0m



|                            |                 |
|----------------------------|-----------------|
| <b>Gateshead Depot</b>     | T 0191 338 8208 |
| <b>Haydock Depot</b>       | T 01744 416 600 |
| <b>High Wycombe Depot</b>  | T 01494 291 777 |
| <b>Leeds Depot</b>         | T 0113 887 2222 |
| <b>Nottingham Depot</b>    | T 0115 919 2000 |
| <b>Tilbury Depot</b>       | T 01375 487 300 |
| <b>West Bromwich Depot</b> | T 0121 525 8844 |

|                              |
|------------------------------|
| E gateshead@falconpp.co.uk   |
| E haydock@falconpp.co.uk     |
| E highwycombe@falconpp.co.uk |
| E leeds@falconpp.co.uk       |
| E nottingham@falconpp.co.uk  |
| E tilbury@falconpp.co.uk     |
| E westbrom@falconpp.co.uk    |

Falcon Panel Products Ltd  
Clock House  
Station Approach  
Shepperton, Middlesex  
TW17 8AN  
E sales@falconpp.co.uk

[www.falconpp.co.uk](http://www.falconpp.co.uk)