

# STREFRAME<sup>®</sup>

## FD60

### Fire-rated Hardwood Door Frame System



Fire-rated performance up to 60 minutes

Fully tested to BS 476 pt 22

Eco friendly - full FSC<sup>®</sup> hardwood composition

Complete system available, section and stops



Certificate Number 006/020



**Strebord<sup>®</sup>**



# Streframe® FD60 Fire-rated Hardwood Door Frame System

0.2

Streframe® FD60 grade Angouma is the latest addition to the Strebord® family. Fully FSC® hardwood with excellent finishing qualities, tight grain and uniform in colour this product is ideal for paint or stain grade applications. Medium density compared to other available hardwoods gives Streframe® FD60 grade Angouma a cutting edge in regards to initial material cost and a reduction in re-finishing due to the excellent standard of the supply.



## High performance

Screw retention is equivalent to other available hardwoods giving assurance that although the density is less the performance is equal if not better. The material works as well as other higher density hardwoods it compares to and no specialised tooling is required to achieve a fine finish ready to assemble into your doorset.

Minimum section tested is 90x32mm with a 32x12mm planted stop.

Seal configurations and recipes are kept at a standard being 2no. lines of 15x4mm set out as our detail to be found in the Strebord® Door Core Technical Manual.

## Quality assured

Fully tested to BS 476 pt 22 in singles and pairs Streframe® FD60 grade Angouma ensures quality and assurance, two of the key aspects of the Strebord® brand.


## Size options

Available in lengths of 2100mm to 2500mm. Machined sections 126mm or 146mm with 32x12mm stops, fully grooved for seals or in sawn boards 150, 175 and 200mm can be supplied should you wish to retain in house machining.

## The Streframe® FD60 Hardwood Door Frame System

A range of sizes and pre-machined\* options, providing a totally flexible ready to assemble doorset component system.

\* Upon application and availability.

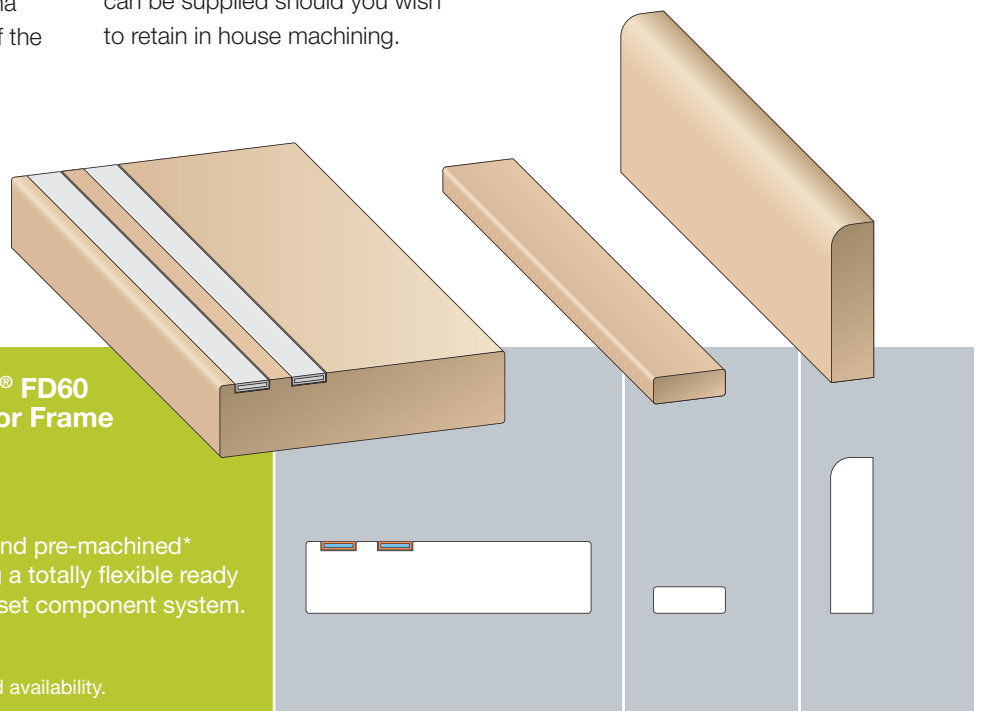

# Streframe® FD60 Fire-rated Hardwood Door Frame System

0.3

Streframe® FD60 grade Angouma is a specially sourced material dedicated for the framing market and targeted to offer bottom line cost savings with the evidence and support that Falcon Panel Products have become renowned for.

One of the few fully FSC® certified quality hardwoods available complete with tested performance and offering a superior finish.

## Features

- FD60 Fire rated hardwood
- Fully tested to BS 476 pt 22
- Complete system, section and stops
- Excellent finishing qualities
- Tight grain and uniform colour
- Ideal for paint or stain grade applications
- Eco friendly - full FSC® hardwood composition
- Screw retention equivalent to other available hardwoods
- Wide range of sizes

## Benefits

- Requires no specialised tooling to achieve finish
- Ready to assemble into a doorset
- Reduction in re-finishing
- Technical support

## Streframe® FD60

One of the few fully FSC® certified quality hardwoods available complete with tested performance and offering a superior finish.



# Streframe® FD60

## Technical details

0.4

FD60 tested and 'Q Marked' within our global assessment for use with Strebord®.

Basic jointing methods, treat Streframe® as you would any other timber based material.

Can be utilised for non fire rated or FD30 doorsets if required.

Seals to be used are all as listed within our global assessment for use with Strebord®.

Stain grade timber.

Paint grade timber.

Lacquer finish can be applied post machining.

450kg/m³ nominal density and greater.

Lighter than conventional FD60 tested hardwoods.

Sustainably sourced from a secured geographic location, maintaining standards.

Extension liners can be applied should wall widths decree.



STREFRAME®

Strebord®



Certificate Number 006/020



Whilst every care has been taken to ensure that the information in this leaflet is correct and up to date, it is not intended to form any part of a contract or give rise to collateral liability, which is hereby specifically excluded. Falcon Panel Products Ltd reserve the right to amend the range of products and services without notice. It is intended only as a guide and designers and specifiers should themselves be satisfied of Streframe's suitability for their design or structure.



Contact your nearest  
Falcon Panel Products Depot



[www.falconpp.co.uk](http://www.falconpp.co.uk)

<b>Gateshead</b>	T 0191 338 8208	E <a href="mailto:gateshead@falconpp.co.uk">gateshead@falconpp.co.uk</a>
<b>Haydock</b>	T 01744 416 600	E <a href="mailto:haydock@falconpp.co.uk">haydock@falconpp.co.uk</a>
<b>High Wycombe</b>	T 01494 291 777	E <a href="mailto:highwycombe@falconpp.co.uk">highwycombe@falconpp.co.uk</a>
<b>Leeds</b>	T 0113 887 2222	E <a href="mailto:leeds@falconpp.co.uk">leeds@falconpp.co.uk</a>
<b>Nottingham</b>	T 0115 919 2000	E <a href="mailto:nottingham@falconpp.co.uk">nottingham@falconpp.co.uk</a>
<b>Tilbury</b>	T 01375 487 300	E <a href="mailto:tilbury@falconpp.co.uk">tilbury@falconpp.co.uk</a>
<b>West Bromwich</b>	T 0121 525 8844	E <a href="mailto:westbrom@falconpp.co.uk">westbrom@falconpp.co.uk</a>